

Sefram  
Sefram

# SEFRAM DAS 1600



## A new family of paperless recorders 6 to 72 channels, to cover all your applications

### Capabilities

- 6 to 72 analogue channels
- Measurement boards :
  - 6 isolated channels universal input, 500V AC or 1000VDC
  - 12 channels multiplexed board (voltage, temperature, pt100)
  - 6 isolated channels for strain gauge, with voltage, pt100 and thermocouples
  - 6 isolated channels 1000V AC\* or 2000V DC\*
  - 4 differential channels high speed board (5MHz) \*
- 16 logical channels
- 15.4 inches panoramic TFT touch screen
- 500Gb hard disk, with fast transfer
- Interface: Ethernet, 6 x USB, VGA
- Power analysis (50Hz, 60Hz, 400Hz, 1kHz)
- Internal battery option
- IRIG board option
- WiFi option
- IEC1010 : CAT III - 600V



### A modular system

The new DAS1600 family is designed to match all your applications in the future. If your applications change, your DAS1600 can be upgraded with an extension chassis. The extension chassis will add 3 slots and then you can have up to 72 analogue channels or mix various measurement boards.

### A panoramic touch screen to ease the operation

With its 15.4 inches touch screen, using the DAS1600 is like a game: the man-machine interface has been designed to be intuitive, all menus are clear and simple and the user's manual can be displayed on the recorder if needed.

### Various analysis functions

The new DAS1600 will provide many automatic measurements, various triggers, the power analysis mode,... All is done to simplify the analysis of complex signals.

### A connected instrument

With its 6 USB interfaces, the LAN interface or through WiFi communication, you can remote control your recorder or download your records. With Virtual Network Computing software (not included), view and control your DAS1600 from your computer or your tablet.... Just like if you have the recorder in front of you!


## ► A modular concept for all your applications

Communication and simplified data export:



With Virtual Network Computing software, you remote control your DAS1600 from a computer or a tablet.

FTP : easy transfer of records

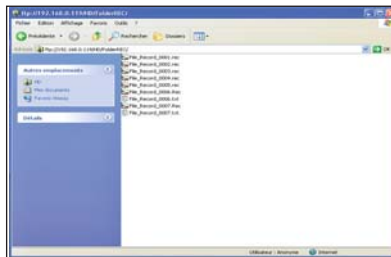

FTP or TCP-IP transfer of files and recorded data display.

WiFi




With the WiFi interface (option) you can take the best benefit of remote control of your recorder. All functions, all modes can be remote controlled.

Several operating modes




Expert mode: user will access to all parameters of the setup.  
User mode: restricted access.

XY mode with pen-up and pen-down.

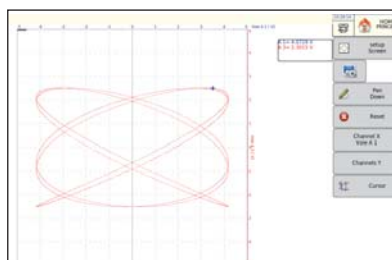

With an efficient XY mode, your DAS1600 will replace your old analogue XY plotter.

FFT Analysis

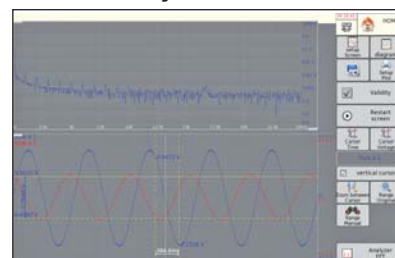


Real time FFT analysis.

## ► Energy / Power Analysis


A very powerfull analysis for single phase, dual phases or three phases networks. Analysis is provided with Fresnel diagram or oscilloscope mode.

### Capabilities

- Single phase, dual phases, three phases networks
- Up to 24 parameters memorized (U, I, W, Wh, ...)
- Network frequency: 40, 50, 60, 400, 1000 Hz
- Fresnel Diagram
- Oscilloscope mode
- Harmonics up to rank 50
- Memorization of harmonics
- 16 calculated values : mean value, RMS value, peak value, crest factor, THD, DF, active power, apparent power, reactive power, power factor (cos), energy,...
- Real time word file of calculated values

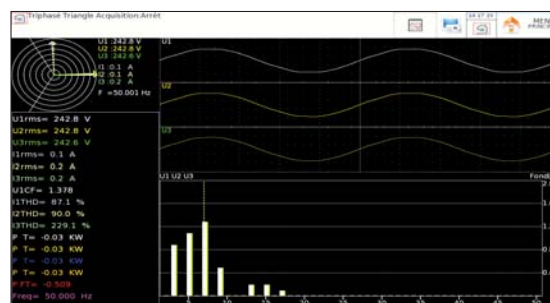

Harmonics up to rank 50 (calculation and memorization)

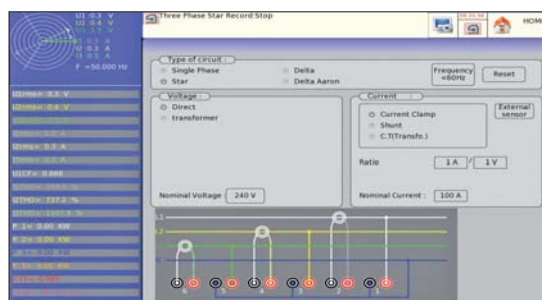

Measurements are done with the voltage input (direct) of the univiversal board and accessories clamps (standard clamps or flexible clamps)





## ► Sefram Viewer

This licence free software is supplied with each recorder. It allows the visualization of the recordings and the data transfer to other applications. SEFRAM Viewer makes the acquired signal analysis easier.

### Capabilities



- Curve printing
- Display of values (text)
- Cursors and zoom
- File concatenation
- 8 math calculations
- Up to 120 characters text notes
- Bitmap, Excel®, txt, csv export
- Easy setup of curves display

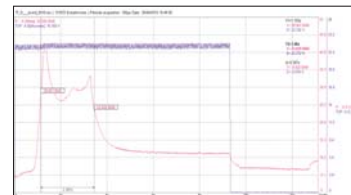

## ► FLEXPRO™ : a powerful software for your data analysis.

With Flexpro® :

- More than 100 functions of statistical and math analysis
- Powerfull graphical display
- Measurement report editing

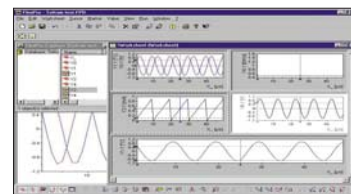

### COMMON FEATURES (FOR ALL MODELS OF THE FAMILY)

#### DISPLAY

15,4 inches TFT touch screen, with backlight  
Resolution 1280 x 800 dots  
f(t) and XY display capability  
Functions: zoom, cursors, zoom between cursors  
Math and scalling functions (Y = aX + B)  
20 automatic measurements available

#### MEMORY

Memorization of setup  
Memory 128 Mwords, in segments  
Internal hard disk 500Gb, with fast transfer ( 6Ms/s)

#### INTERFACES AND I/O

Interfaces 6 x USB (2 on the front panel, 4 on the rear panel),  
VGA, Ethernet  
Logical channels 16 logical channels (V max: 24V, Zin = 4,7kohms)  
Sensor supply 12V / 0,2A max (non floating)  
Alarm output 3 output, with 1 relay (24V/100mA)  
and 2 x TTL 5V

#### POWER ANALYSIS FUNCTION

(this function can be used with one universal board and accessories for current measurements)

Networks single phase, dual phases, three phases  
Frequency 50-60Hz, 400Hz and 1000Hz  
Display oscilloscope, Fresnel diagram  
Harmonics calculated up to rank 50,  
with recording capabilities  
Measurements 24 measurements: U and I (mean values,  
RMS, peak), crest factor, power (active,  
reactive, apparent), power factor, harmonics,  
THD, DF, frequency, energy...

#### GENERAL AND ENVIRONNEMENT

Power supply 95VAC to 264VAC, 47Hz to 63Hz  
Consumption 47 VA max  
Operating temperature 0°C to +40°C  
Storage temperature -20°C à +60°C  
Maximum operating RH 80% max.  
Dimensions (without add. chassis) 298 x 394 x 218 mm  
Dimensions with add. Chassis 298 x 394 x 295 mm  
Weight (with one board installed) 8kg (10kg with add. chassis)

### SPECIFICATIONS - UNIVERSAL INPUT BOARD

Channels :	6 per board	
<b>VOLTAGE</b>		
DC voltage ranges:	1mV to 1000 V	
Max offset:	± 5 ranges ( except 1000V)	
Accuracy:	± 0,1% ± 10 µV ± 0,2% offset	
TRMS AC+DC :	200 mV to 500 V	
Bandwidth (-3dB):	5Hz to 500Hz	
Crest factor :	2,2	
<b>FREQUENCY</b>		
Sensitivity	300mV rms min.	
Duty cycle	10%	
Frequency range	10Hz to 100 kHz	
Basic accuracy	0,2% of full scale	
Maximum input voltage	± 500VDC or 440V AC (sine)	
<b>TEMPERATURE</b>		
Sensor	Using environnement	Ranges
J	-20°C to 1200°C	20°C to 2000°C
K	-250°C to 1370°C	20°C to 2000°C
T	-200°C to 400°C	20°C to 500°C
S	-50°C to 1760°C	50°C to 2000°C
B	-200°C to 1820°C	50°C to 2000°C
E	-250°C to 1000°C	20°C to 1000°C
N	-250°C to 1300°C	20°C to 1000°C
W5	0 à 2320°C	50°C to 2000°C
Accuracy	Cold junction compensation : ±1,25°C	
<b>SAMPLING</b>		
Resolution	14 bits	
Sampling rate	1M sample/sec per channel	
Memory length	32M word in segments of up to 128 Blocks	
Triggering	Positive edge, negative edge, on logical input, delay, Go No Go.	
Pre trigger	-100% à +100%	
<b>BANDWIDTH</b>		
Analog input bandwidth (-3dB)	range 1V: 100kHz range ≤ 50mV : 20kHz min	
Programmable digital filters	10Hz, 100Hz, 1kHz, 10kHz	
Input impedance (DC)	>25MΩ for range <1V 1MΩ for upper ranges	
Input capacitance	150pF typ.	
Maximum input voltage	between one channel and the frame ground ± 500V between 2 terminals of one channel ± 500V	
Isolation between frame ground and channel	>100MΩ at 500VDC	



## SPECIFICATIONS - MULTIPLEXED BOARD

Channels :	12 per board	
<b>VOLTAGE</b>		
DC voltage ranges:	1mV to 50 V	
Max offset:	± 5 ranges	
Accuracy:	± 0,1% ± 10µV ± 0,1% offset	
TRMS AC+DC :	200mV to 50V.	
Bandwidth (-3dB):	5Hz to 100Hz	
Crest factor :	2,2	
<b>TEMPERATURE</b>		
Sensor	Using environnement	Ranges
PT100 (2,3,4 Fils)	-200°C to 850°C	20°C to 1000°C
J	-20°C to 1200°C	20°C to 2000°C
K	-250°C to 1370°C	20°C to 2000°C
T	-200°C à 400°C	20°C to 500°C
S	-50°C to 1760°C	50°C to 2000°C
B	-200°C to 1820°C	50°C to 2000°C
E	-250°C to 1000°C	20°C to 1000°C
N	-250°C to 1300°C	20°C to 1000°C
W5	0 to 2320°C	50°C to 2000°C
Accuracy	Cold junction compensation: ±1,25°C	
<b>SAMPLING</b>		
Resolution	16 Bits	
Sampling rate	200µs maxi. (5K sample/s)	
Memory length	32M word in segments of up to 128 Blocks	
Triggering	Positive edge, negative edge, on logical input, delay, Go No Go.	
Pre trigger	-100% à +100%	
<b>BANDWIDTH</b>		
Analog input bandwidth (-3dB)	1kHz à -3dB	
Programmable digital filters	0,1Hz, 1Hz, 10Hz, 100Hz	
Input impedance (DC)	2 MΩ ranges >5V	
Input capacitance	10MΩ (150pF) for other ranges	
Maximum input voltage	between one channel and the frame ground ± 50V between 2 terminals of one channel ± 50V all input are differential, non isolated	
Common mode voltage (max.)	± 5V for ranges < 5V ± 50V for ranges > 5V	

## MEASUREMENT BOARDS AND OPTIONS (\*= FACTORY OPTION)

984405500	16 isolated logical channels module
910007000	Logical channels cords
984402000	12 channels multiplexed board
984401000	6 isolated channels universal board
984402500	6 isolated channels strain gauge / temperature board
916005000	Additional chassis with 3 slots*
916006000	6 isolated channels high voltage board
916003000	IRIG board*
916001000	Battery option*
916004500	Wifi communication option
916007000	Rack mounting kit for DAS1600/800

## CURRENT CLAMPS

A1257	Kit with 3 flexible clamps 30A/300A/3000A AC for three phases measurements
A1287	Flexible clamp 30A/300A/3000A AC
SP201	Current clamp 200A AC, 10mV/1A, D 15mm
SP221	Current clamp 100A AC, 100mV/1A, D 15mm
SP230	Current clamp 1200A AC, 10mV/1A, D 50mm
SP261	Current clamp 1200A AC+DC, 1mV/1A, D 50mm
SP270	Current clamp 2000A AC, 1mV/1A, D 70mm

## SHUNTS

910007100	Shunt 0,01 ohm 3A max
910007200	Shunt 0,1 ohm 1A max
989006000	Shunt 1 ohm 0,5A max
912008000	Shunt 10 ohms 0,15A max
989007000	Shunt 50 ohms 0,05A max
207030301	Shunt 0,01 ohm 30A max
207030500	Shunt 0,001 ohm 50A max

## TRANSPORTATION CASE (TROLLEY)

914007500	For DAS1600 without additional chassis
-----------	--

## FLEXPRO® ANALYSIS SOFTWARE

100081	Flexpro® View (basic version)
100082	Flexpro® Full

## STRAIN GAUGE BOARD - SPECIFICATIONS

Channels	6 (fully isolated)
Measurements	Strain gauge, voltage, thermocouple and current with optional external shunt
Input	differential, fully isolated
Input impedance	2 MΩ for ranges < 1 Volt 1 MΩ for ranges ≥ 1 Volt
Maximum input voltage	200V DC
(Between one input and ground, or between ground and mechanical chassis)	
Input voltage	± 50V
Isolation	>100 MΩ under 500V
(between channels and mechanical chassis)	
Input connectors	Fast plug-in / plug-out, 6 contacts per channel

All accuracies are given with 1Hz filter

## VOLTAGE MEASUREMENT

Maximum range	50 V
Lowest range	1 mV
Maximum offset	±50V limited at ± 5 ranges
Accuracy	± 0.1% of full scale ± 10µV ± 0.1% of offset
Resolution	16 bit
Offset drift	100ppm/°C ± 1 µV/°C
Sampling rate	100kHz (or 10µs)
Noise	<30µV without filter

## STRAIN GAUGE MEASUREMENT

The unit is µSTR (micro strain) -	2000µSTR = 1 mV/V
Bridge	Full bridge (4 and 6 wires), half bridge
Automatic balancing range	±25000 µSTR
Bridge supply voltages	2V and 5V (symmetrical ±1V and ±2.5V)
Gauge rate	2 (adjustable between 1.8 and 2.2)
Maximum range	50 000 µSTR
Minimum range	1000 µSTR
Maximum offset	±50000µSTR
Accuracy	± 0.1% of full scale ± 5µSTR ± 0.1% of offset
Resolution	16 bit
Sampling rate	100kHz (or 10µs)
Offset drift	100ppm/°C ± 1 µV/°C

## BANDWIDTH

3 dB bandwidth	>18 KHz
Analogue filter	
(low pass 60dB/decade)	1KHz, 100Hz, 10Hz
Low pass (digital)	1 Hz, 0.1 Hz, 0.01 Hz, 0.001 Hz

## Temperature measurement

Cold junction compensation for J,K,T,S,N,E,  
W5 thermocouples : ± 1.25 °C

Sensor	Maximum possible range	Range
COUPLE J	-210°C to 1200 °C	20 °C to 2000 °C
COUPLE K	-250°C to 1370 °C	20 °C to 2000 °C
COUPLE T	-200°C to 400 °C	20 °C to 500 °C
COUPLE S	-50°C to 1760 °C	50 °C to 2000 °C
COUPLE B	200°C to 1820 °C	50 °C to 2000 °C
COUPLE E	-250°C to 1000 °C	20 °C to 1000 °C
COUPLE N	-250°C to 1300 °C	20 °C to 1000 °C
COUPLE W5	0°C to 2320 °C	50 °C to 2000 °C

FTDAS1600 A 00 - Specifications can be updated without notice



32, rue Edouard Martel • B.P. 55 • 42009 - St Etienne cedex 2  
**Tel. +33 (0).4.77.59 36 81**  
 Fax. +33 (0).4.77.57.23.23  
 Website : [www.sefram.fr](http://www.sefram.fr) • e-mail : [sales@sefram.fr](mailto:sales@sefram.fr)

## For assistance and ordering

ERIMEC Messgeräte  
53840 Troisdorf

T : +49 (0)2241 255188-0  
[info@erimec.de](mailto:info@erimec.de)

